


[Disabling The Key-In Warning Chime \(aka the Annoying Beeper\) DIY Guide](#)
[For the T31 Nissan X-Trail Models](#)

Hi all,

I've found a simple, non-destructive way of disabling the key-in-ignition beep - just unplug connector M9.

Ohhh, what's M9? It's a little 2-pin plug in the wheel column, connecting the key-in-ignition switch to the wiring harness back to the 'Time Control Module' (that which beeps).

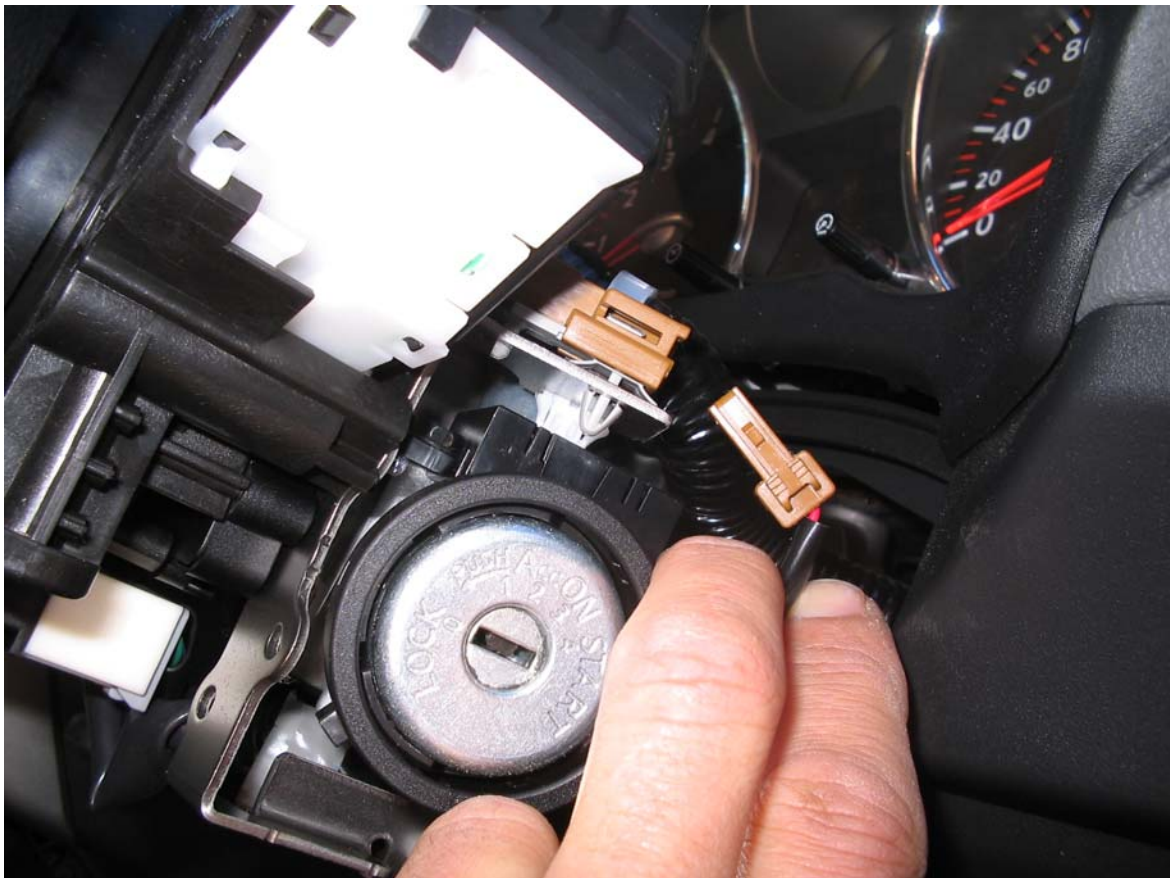

Unplug that little connector and you'll forever be at peace with the door open.

BTW, removing the steering column covers is easy, Remove 2 screws under steering shroud, and unclip shroud. (you may have to lower the wheel and pull out ignition cover)

Headlight warning chime ----- working.

Handbrake on chime -----working.

Key in ignition, door ajar chime ----- NOT WORKING!!!!!!! (exactly as we wanted)

IMPORTANT NOTE: By disabling the key-chime the remote buttons for locking doors will operate, so if you press on the remote button accidentally while the key is in the

ignition, the doors will lock. When you unlock the doors (with the key still in the ignition) and if driving at night, the lights of the car will turn-off thinking that you have left the car unlocked, so it automatically shuts off the lights. Please consider the affects of this mod in this particular case and do so at your own risk!

Tony